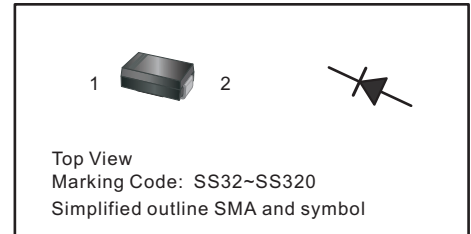


**Surface Mount Schottky Barrier Rectifier**  
**Reverse Voltage - 20 to 200 V**  
**Forward Current - 3.0A**

**PINNING**

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |


**Features**

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

- Case: SMA
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 60mg / 0.0021oz

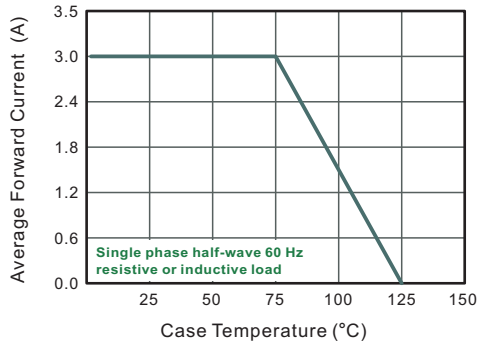
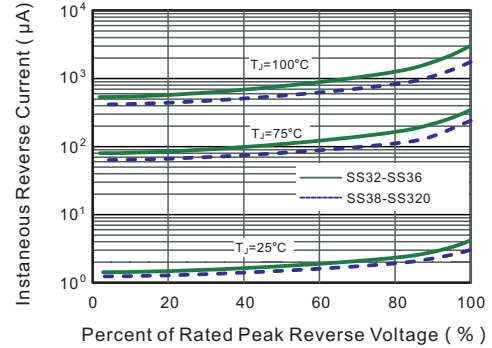
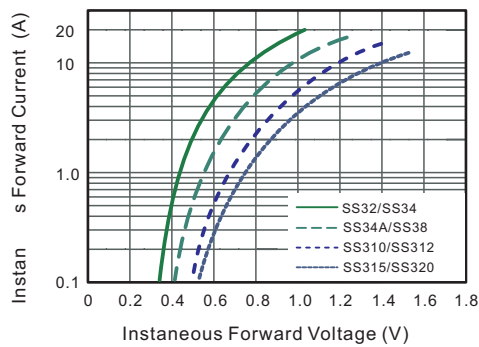
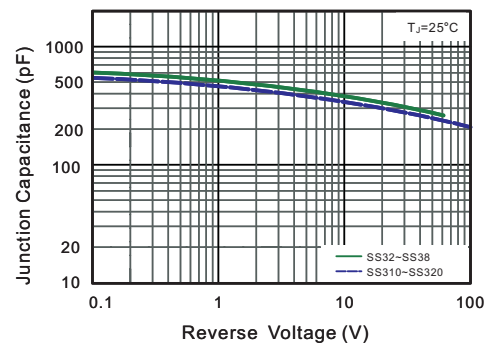
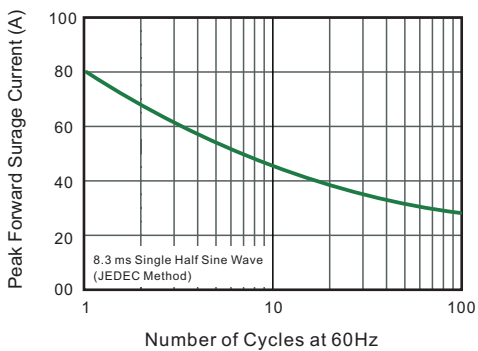
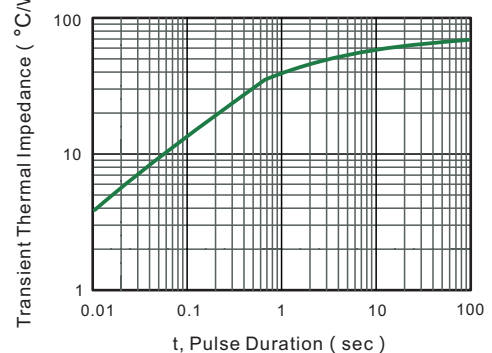
**Absolute Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

| Parameter  | Symbols         | SS32       | SS34 | SS34A | SS36 | SS38     | SS310 | SS312 | SS315 | SS320 | Units |
|--|-----------------|------------|------|-------|------|----------|-------|-------|-------|-------|-------|
| Maximum Repetitive Peak Reverse Voltage  | $V_{RRM}$       | 20         | 40   | 45    | 60   | 80       | 100   | 120   | 150   | 200   | V     |
| Maximum RMS voltage  | $V_{RMS}$       | 14         | 28   | 31.5  | 42   | 56       | 70    | 84    | 105   | 140   | V     |
| Maximum DC Blocking Voltage  | $V_{DC}$        | 20         | 40   | 45    | 60   | 80       | 100   | 120   | 150   | 200   | V     |
| Maximum Average Forward Rectified Current  | $I_{F(AV)}$     | 3.0        |      |       |      |          |       |       |       |       | A     |
| Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)            | $I_{FSM}$       | 80         |      |       |      |          |       |       |       |       | A     |
| Max Instantaneous Forward Voltage at 3A  | $V_F$           | 0.55       | 0.70 |       |      | 0.85     |       | 0.95  |       |       | V     |
| Maximum DC Reverse Current $T_a = 25^\circ\text{C}$<br>at Rated DC Reverse Voltage $T_a = 100^\circ\text{C}$ | $I_R$           | 0.5<br>5   |      |       |      | 0.3<br>3 |       |       |       |       | mA    |
| Typical Junction Capacitance <sup>(1)</sup>  | $C_j$           | 450        |      |       |      | 400      |       |       |       |       | pF    |
| Typical Thermal Resistance <sup>(2)</sup>  | $R_{\theta JA}$ | 70         |      |       |      |          |       |       |       |       | °C/W  |
| Operating Junction Temperature Range   | $T_j$           | -55 ~ +125 |      |       |      |          |       |       |       |       | °C    |
| Storage Temperature Range  | $T_{stg}$       | -55 ~ +150 |      |       |      |          |       |       |       |       | °C    |

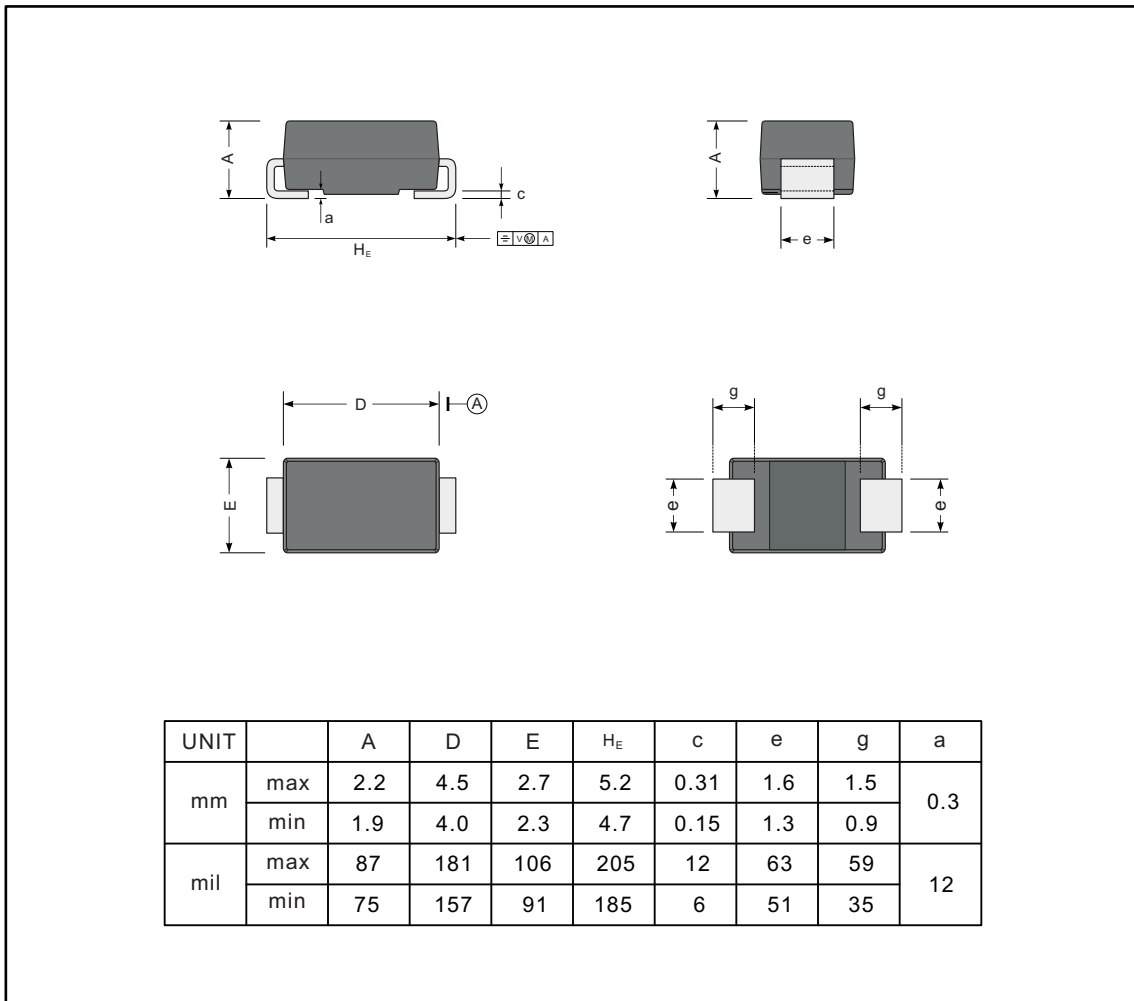
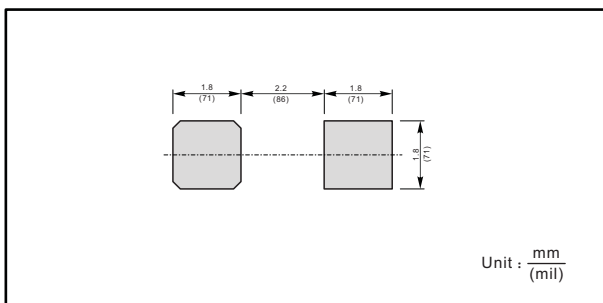
( 1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

**Fig.1 Forward Current Derating Curve**

**Fig.2 Typical Reverse Characteristics**

**Fig.3 Typical Forward Characteristic**

**Fig.4 Typical Junction Capacitance**

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

**Fig.5- Typical Transient Thermal Impedance**


**PACKAGE OUTLINE**

Plastic surface mounted package; 2 leads

**SMA**

**The recommended mounting pad size**

**Marking**

| Type number | Marking code |
|-------------|--------------|
| SS32        | SS32         |
| SS34        | SS34         |
| SS34A       | SS34A        |
| SS36        | SS36         |
| SS38        | SS38         |
| SS310       | SS310        |
| SS312       | SS312        |
| SS315       | SS315        |
| SS320       | SS320        |