


**NPN Transistors**

**MMBTA42**

■ Features

- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary to MMBTA92 (PNP)

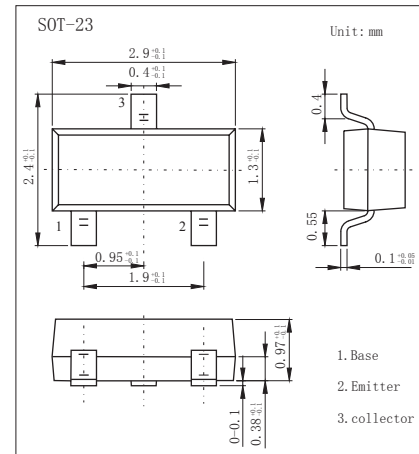

■ Absolute Maximum Ratings  $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	$V_{CB0}$	300	V
Collector - Emitter Voltage	$V_{CE0}$	300	
Emitter - Base Voltage	$V_{EB0}$	5	
Collector Current - Continuous	$I_C$	500	mA
Collector Power Dissipation	$P_C$	350	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	357	$^\circ\text{C}/\text{W}$
Junction Temperature	$T_J$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to 150	

■ Electrical Characteristics  $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{CB0}$	$I_C = 100 \mu\text{A}, I_E = 0$	300			V
Collector- emitter breakdown voltage	$V_{CE0}$	$I_C = 1 \text{ mA}, I_B = 0$	300			
Emitter - base breakdown voltage	$V_{EB0}$	$I_E = 100 \mu\text{A}, I_C = 0$	5			
Collector-base cut-off current	$I_{CB0}$	$V_{CB} = 200 \text{ V}, I_E = 0$			0.1	$\mu\text{A}$
Emitter cut-off current	$I_{EB0}$	$V_{EB} = 5 \text{ V}, I_C = 0$			0.1	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$			0.2	V
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$			0.9	
DC current gain	$h_{fe} (1)$	$V_{CE} = 10 \text{ V}, I_C = 1 \text{ mA}$	60			
	$h_{fe} (2)$	$V_{CE} = 10 \text{ V}, I_C = 10 \text{ mA}$	100		300	
	$h_{fe} (3)$	$V_{CE} = 10 \text{ V}, I_C = 30 \text{ mA}$	60			
Transition frequency	$f_T$	$V_{CE} = 20 \text{ V}, I_C = 10 \text{ mA}, f = 30 \text{ MHz}$	50			MHz

■ Classification of  $h_{fe}(2)$

Type	MMBTA42	MMBTA42-L
Range	100-300	100-200
Marking	1D	



炬芯微  
XUANXINWEI

# SMD Type Transistors

## NPN Transistors MMBTA42

### Typical Characteristics

